
Instructions

GREASE JOCKEY




Single Axle Module Kit #563647



312886B EN Bulletin GJ-30004

Typical Layout

Point No.	Description	Meter Size	Tube Color	Bundle & marking	Recommended Fitting P/N
1	PLUG	•			
2	PLUG				
3	PLUG				
4	PLUG				
5	PLUG				
6	PLUG				
7	SLACK ADJUSTER	1	Orange	2-Tube Unmarked	556638 Elbow
8	"S" CAM	0	Black		556638 Elbow
9	SLACK ADJUSTER	1	Orange		556638 Elbow
10	"S" CAM	0	Black		556638 Elbow
11	PLUG				
12	PLUG	•	•	•	

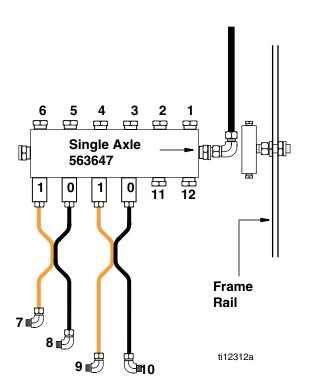

Installation Instructions

- Locate hole or drill and ream a 5/8" hole in frame rail.
- 2. Mount module through hole in frame with lock washer against hex on stud. **Do not overtighten.**
- 3. Run each twin line to the brake slack adjuster and "S" cam following the air hoses from the control valve to the brake cams. This will allow for enough slack in the lines for axle movement.
- 4. Make sure the orange lines going to the slack adjusters have enough of a loop to allow movement of the actuator.
- 5. The main line connection is through an elbow, 556640, at one end. There may be a plug in the other end, another elbow or a straight fitting to allow grease to the next module.

Graco Information and Warranty

Please contact Graco Customer Service for all inquiries regarding service, replacement parts and warranties.

For the latest information about Graco products, visit www.graco.com

For patent information visit www.graco.com/patents

TO PLACE AN ORDER, contact your Graco distributor or call to identify the nearest distributor. **Phone:** 612-623-6928 **or Toll Free:** 1-800-533-9655, **Fax:** 612-378-3590

All written and visual data contained in this document reflects the latest product information available at the time of publication.

Graco reserves the right to make changes at any time without notice.

This manual contains English. MM 312886 GJ-30004

Graco Headquarters: Minneapolis International Offices: Belgium, China, Japan, Korea