CONTRACTOR POWERSHOT™ GUNS

GRACO

Introducing the Industry's Only Electric-Powered Airless Guns



PROVEN QUALITY. LEADING TECHNOLOGY.





YOU ASKED AND WE DELIVERED!

WE'VE EXPANDED ELECTRIC-POWERED GUN TECHNOLOGY BY POPULAR DEMAND!



FOR EVERY AIRLESS PAINT SPRAYER

FOR EVERY PAINTING AND FINISHING APPLICATION



New Residential and Repaint



Maintenance and Remodeling



Finishing and Refinishing



Commercial and Multifamily

CONTRACTOR POWERSHOT™

(PATENT PENDING)

INTRODUCING THE INDUSTRY'S ONLY ELECTRIC-POWERED AIRLESS GUNS



ELECTRIC-POWERED GUN VIRTUALLY ELIMINATES SPITS

•Instant-Response trigger actuates 80X faster than traditional guns

INDUSTRY'S LIGHTEST TRIGGER PULL FORCE


· All day comfort with 80% less force on each trigger pull

LIGHTEST AIRLESS GUN EVER BUILT FASTEST SERVICE ON THE JOBSITE



OPERATES WITH **EVERY**AIRLESS SPRAYER

CONNECT TO XT SPRAYERS TO UNLOCK A NEW LEVEL OF PERFORMANCE

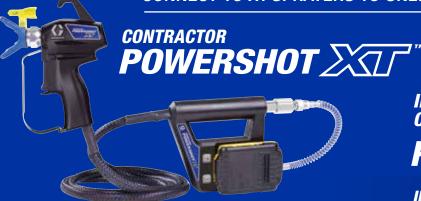



INCLUDES ALL FEATURES OF THE CONTRACTOR POWERSHOT STANDARD

PLUS

INSTANT GUN-TO-SPRAYER COMMUNICATION

REMOTELY ADJUST PRESSURE AT THE GUN

SMARTSTALL™ ELIMINATES MATERIAL BLAST



2

CONTRACTOR POWERSHOT STANDARD (PATENT PENDING)

REVOLUTIONARY AIRLESS GUN PERFORMANCE

Breakthrough airless gun technology designed to deliver the best airless finish, reduce user fatigue and increase your production rate.

ELECTRIC-POWERED GUN VIRTUALLY ELIMINATES SPITS

Instant-Response Trigger

• Deliver a Perfect Airless Finish by virtually eliminating spits with the industry's fastest trigger speed — 80X faster than traditional guns

SPRAY LONGER WITH GREATER COMFORT

Reduced Fatique

- The world's lightest gun ever built Only 1.1 lbs (0.49 kg) in-hand weight
- Industry's lightest trigger pull force Only 0.8 lbs (0.36 kg) at any spray pressure
- · Allowing you to spray all day long with ease

INCREASED SPRAY CONTROL

Flexible Whip Hose

- Gun whip hose provides superior spray control and reduces fatigue -1/8 in x 6 ft (0.3 cm x 1.8 m)
- PowerPak™ whip hose & swivel delivers easy tangle free hose management -1/8 in x 1.5 ft (0.3 cm x 45 cm)

ALL DAY SPRAYING POWER & CONVENIENCE

PowerPak System

- Spray all day long on a single battery charge
- Ergonomic in-line handle provides contractors a comfortable handle to hold
- Easy Out[™] gun filter keeps debris out of your coating



 Delivers Perfect Airless Finish[™] at 50% less pressure resulting in up to 2X longer tip life



HANDS-FREE HOSE MANAGEMENT

PowerPak Belt & Holster

· Quickly attach the PowerPak system for hands-free hose management







EASY OUT GUN FILTER

FASTEST SERVICE ON THE JOBSITE • Rebuild your gun in seconds with the

ProConnect® replacement cartridge





Contractor PowerShot



207

OPERATES WITH EVERY AIRLESS PAINT SPRAYER

READY TO ATTACH OUT OF THE BOX!

EVERY GUN COMES PRE ASSEMBLED AND INCLUDES:

DEWALT

- ✓ PowerPak System
- ✓ Gun Whip Hose: 1/8 in x 6 ft (0.3 cm x 1.8 m) ✓ 60 Mesh Easy Out Gun Filter
- ✓ PowerPak Whip Hose: 1/8 in x 1.5 ft (0.3 cm x 45 cm)
- ✓ Hose Management Swivel

- ✓ RAC X™ LP 517 Reversible SwitchTip & quard
- ✓ PowerShot Belt & Holster
- √ (2) DEWALT® 20V Compact Lithium-ion batteries and a charger

CONTRACTOR POWERSHOT



INCLUDES ALL FEATURES FOUND ON CONTRACTOR POWERSHOT STANDARD

PLUS INSTANT GUN-TO-SPRAYER COMMUNICATION



SEE IT IN ACTION graco.com/PowerShot

REMOTELY ADJUST PRESSURE AT THE GUN

- Quickly adjust your pressure from anywhere up to 200 feet (60 m) away
- Adjust your spray pressure by increments of 25 psi (.7 bar) in Low Pressure Mode or 50 psi (3.4 bar) in High Pressure Mode





ADJUST YOUR PRESSURE EVEN FROM A LIFT

AUTOMATICALLY ELIMINATE MATERIAL BLAST AND GUN KICK BACK ON EACH TRIGGER PULL

- Provides most consistent stall and running pressure for the Perfect Airless Finish
- Spray at the industries lowest pressures eliminate material blast on each trigger pull

INSTANTLY STARTS AND STOPS THE MOTOR WITH EACH TRIGGER PULL







Release the trigger to STOP THE MOTOR

EVERY GUN COMES PRE ASSEMBLED AND INCLUDES:

- ✓ PowerPak System
- ✓ Gun Whip Hose: 1/8 in x 6 ft (0.3 cm x 1.8 m) ✓ 60 Mesh Easy Out Gun Filter
- ✓ PowerPak Whip Hose: 1/8 in x 1.5 ft (0.3 cm x 45 cm)

1. Pull the trigger to **START THE MOTOR**

✓ Hose Management Swivel

- ✓ RAC X LP 517 Reversible SwitchTip & guard
- ✓ PowerShot Belt & Holster
- ✓ (2) DEWALT 20V Compact Lithium-ion batteries and a charger

SMART DISPLAY TO

EASILY UNLOCK THE BENEFITS OF THE POWERSHOT XT WITH SMARTDISPLAY XT

INSTANT GUN-TO-SPRAY COMMUNICATION

- · Remotely adjust you spray pressure right from the gun from anywhere up to 200 feet (60 m) away
- · Eliminate pressure surge and gun kickback on each trigger pull



from anywhere

BLUELINK® JOBSITE MANAGEMENT Track every sprayer — exact

- location and hourly productivity Know job progress — on-demand productivity, facts and reporting



POWERSHOT XT EXCLUSIVELY WITH



490 XT-1095 XT **Standard Series** Requires Purchase of SmartDlsplay XT to Connect with







Locate Every

Spraver





- Free to use no monthly fees
- Select from 13 languages







2. Pair gun to sprayer with a push of a button never before

Know Job

Progress



3. Experience airless like

CONNECTING IS AS EASY AS 1-2-3:



CONTRACTOR POWERSHOT AIRLESS GUNS

Description	Contractor PowerShot Standard	Contractor PowerShot	Contractor PowerShot with SmartDisplay XT
Maximum Tip Size	0.039"	0.039"	0.039"
Maximum psi (bar)	3300 (227)	3300 (227)	3300 (227)
In-Hand Weight lbs (kg)	1.1 (0.49)	1.1 (0.49)	1.1 (0.49)
Trigger Pull Force lbs (kg)	0.8 (0.36)	0.8 (0.36)	0.8 (0.36)









Part Number	18H300	18H301	18H313
Compatible Airless Sprayers	Every Airless Sprayer	Graco XT Sprayers	Graco XT Sprayers
PowerPak System	PowerPak Standard	PowerPak XT	PowerPak XT
Electric-Powered Gun	✓	✓	✓
Virtually Eliminates Spits	✓	✓	✓
Remote Pressure Adjustment		✓	✓
SmartStall		✓	✓
SmartDisplay XT Included			✓

0 -517

RAC X LOW PRESSURE SWITCHTIPS (LPxxx)

			Orifice Size - Inches							(Neon Handle)				
.031	.029	.027	.025	.023	.021	.019	.017	.015	.013	(mm)	in			
							217			(102-152)	4-6			
						319	317	315	313	(152-203)	6-8	Width		
			425	423	421	419	417	415		(203-254)	8-10			
		527	525	523	521	519	517	515		(254-305)	10-12	<u>ب</u>		
631	629	627	625	623	621	619	617			(305-356)	12-14	ш.		
731	729		725	723						(356-406)	14-16			
1.03	.90	.77	.67	.57	.47	.38	.31	.24	.18	Flow rate (gpm)* .18				
3.90	3.42	2.96	2.54	2.15	1.79	1.47	1.17	.91	.69	Flow rate (lpm)*				
30	60	60	60	60	60	60	60	60	100	Recommended filter size 1				
	729 .90 3.42	.77 2.96	625 725 .67 2.54	623 723 .57 2.15	.47 1.79	.38 1.47	.31 1.17	.24	.18	(305-356) (356-406) m)*	12-14 14-16 rate (gpr rate (lpn	Flow Flow		

Note: Lowering spray pressure can reduce flow in some materials. Increase tip orifice size to maintain speed and material flow if needed.



RAC X FINE FINISH LOW PRESSURE SWITCHTIPS (FFLPxxx)

(Gr	een Ha	ndle)	Orifice Size - Inches						
	in	(mm)	.006	.008	.010	.012	.014	.016	
₽	2-4	(51-102)	106	108	110	112			
₽	4-6	(102-152)	206	208	210	212	214		
Fan Width	6-8	(152-203)		308	310	312	314		
굡	8-10	(203-254)		408	410	412	414		
	10-12	(254-305)			510	512	514	516	
Flow	Flow Rate (gpm)*			.07	.11	.15	.21	.27	
Flow	Flow Rate (lpm)*			.26	.41	.59	.80	1.04	
Recor	Recommended filter size			200	200	200	100	60	



RAC X WIDERAC™ LOW PRESSURE SWITCHTIPS (WRLPxxxx)

(Neon Handle)					0ri	fice S	ize - I	nches	;
Fan Width	in	(mm)	.021	.023	.025	.027	.029	.031	.033
Fan	24	(610)	1221	1223	1225	1227	1229	1231	1233
Flow rate (gpm)*		.47	.57	.67	.77	.90	1.03	1.17	
Flow rate (lpm)*			1.79	2.15	2.54	2.96	3.42	3.90	4.42
Recommended filter size			60	60	60	60	60	30	30

^{*} Water @ 2000 psi, 138 bar, 13.8 MPa—paints with a higher viscosity will decrease the flow rate. Example: for a tip with a .027 orifice and a 24 in (305 mm) pattern, order WRLP1227.

WideRAC Low Pressure Conversion Chart Traditional Tip Size WRLP Tip Size 414 or 515 1221 or 1223 417 or 517 1223 or 1225 419 or 519 1225 or 1227 421 or 621 1229 or 1231 523 or 623 1233 or 1235 525 or 625 1235 or 1237

ACCESSORIES

Part number	Replacement Parts
2006609	PowerShot Material Supply Whip Hose 1/8 in x 1.5 ft (0.3 cm x 45 m)
2006608	PowerShot Gun Whip Hose 1/8 in x 6 ft (0.3 cm x 1.8 m)
2005788	PowerShot ProConnect Cartridge
20B432	SmartDisplay XT Modular Accessory
18F891	Replacement Belt
2006715	PowerShot Holster

Part Number	Contractor Easy Out Gun Filters
287032	60 Mesh Gun Filter (Black)
287033	100 Mesh Gun Filter (Blue)
257130	200 Mesh Gun Filter (Red)





EVERY PART COUNTS

Replacement parts are often purchased solely on the basis of price. However, the small amount of money saved will ultimately put your performance and your business at risk.

Why Demand Genuine Graco Parts?

TIME AND MONEY

Cheaper parts ultimately cost you more time and money in extra repair costs, extra labor hours, etc.

PERFORMANCE AND RELIABILITY

Only genuine Graco parts deliver the legendary Graco standard of performance and the lowest downtime.

SAFETY

One non-Graco part can lead to injury and downtime. Graco parts deliver best possible quality to deliver safest experience.

WARRANTY

Warranty conditions only remain valid with genuine Graco parts. Defects or damage caused by non-Graco parts are not covered.

1-YEAR WARRANTY*

Coverage against defects in materials and workmanship on the entire sprayer.

3-YEAR DEWALT DEFECT WARRANTY*

Coverage against defects in materials and workmanship on batteries and charger.

See your local Graco Distributors for country specifics. See printed product warranty for complete warranty terms and conditions.

How to Recognize Genuine Graco Parts

ENGRAVED GRACO LOGO

The Graco logo is engraved on all of our piston rods, cylinders, and sleeves.

HOLOGRAPHIC STICKER

A holographic sticker is always on the packaging of a genuine Graco repair kit.

GRACO QUALITY YOU CAN FEEL

Genuine Graco parts are built tough and feel more robust than other manufacturers' parts.



gracopartsbook.com

The fast and easy way to look up common Graco parts.



Every Graco purchase comes with A+ Customer Service.

Questions? Call (844) 241-9499

For more information visit graco.com/contractor

©2024 Graco Inc. 3J0652A 3/24 All written and visual data contained in this document are based on the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice. Trademarks are referenced herein for identification purposes only. All trademarks are the property of their respective owners. Product covered by issued and pending patents, see graco.com/patents. DeWALT* and the DeWALT Logo are trademarks of DeWALT Industrial Tool Co. and are used under license. With respect to 20V MAX, maximum initial battery voltage (measured without workload), is 20 volts. Nominal is 18 volts.