

# Cart-Mounted Air-Assisted Package

308690L


## Table of Contents

List of Models .....	2
Warnings .....	3
Setup .....	6
Operation .....	10
Parts .....	14
Technical Data .....	20
Dimensions .....	23
Graco Standard Warranty .....	24
Graco Information .....	24



### Important Safety Instructions

Read all warnings and instructions in this manual.  
Save these instructions.

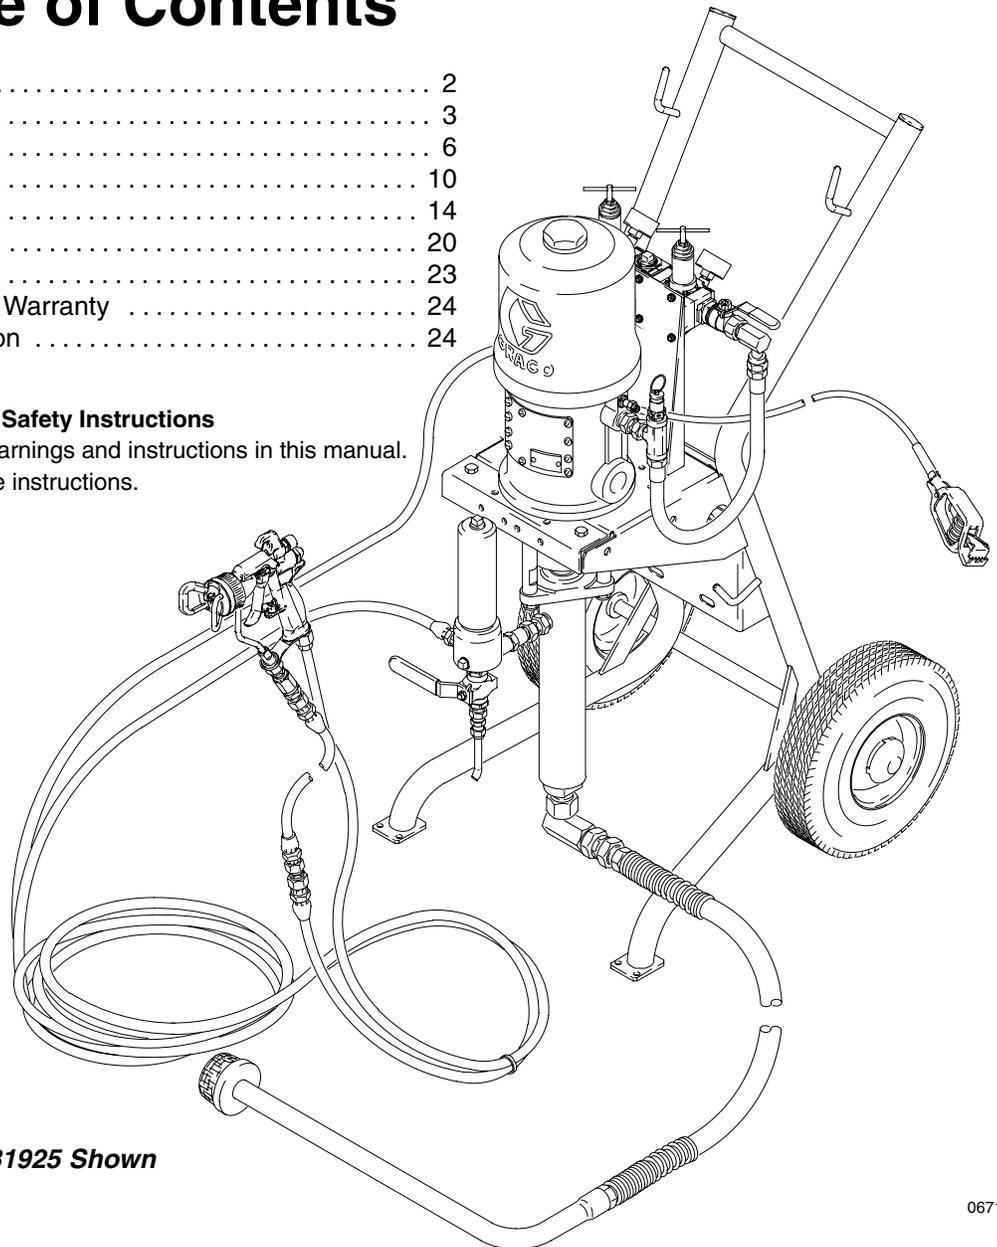

*Model 231925 Shown*

06719B

PROVEN QUALITY. LEADING TECHNOLOGY.

# List of Models

Package Part No.	Series	Pump Model	Ratio	Maximum Fluid Working Pressure	Maximum Air Input Pressure
231925	C	President®, carbon steel (with 25 ft hose, and gun)	30:1	3000 psi (21 MPa, 210 bar)	100 psi (0.7 MPa, 7 bar)
231926	A	President®, carbon steel (without hose and gun)	30:1	3000 psi (21 MPa, 210 bar)	100 psi (0.7 MPa, 7 bar)
231927	C	President®, carbon steel (with 50 ft hose, and gun)	30:1	3000 psi (21 MPa, 210 bar)	100 psi (0.7 MPa, 7 bar)
231934	C	President®, stainless steel (with 25 ft hose, and gun)	30:1	3000 psi (21 MPa, 210 bar)	100 psi (0.7 MPa, 7 bar)
231935	A	President®, stainless steel (without hose and gun)	30:1	3000 psi (21 MPa, 210 bar)	100 psi (0.7 MPa, 7 bar)
231936	C	President®, stainless steel (with 50 ft hose, and gun)	30:1	3000 psi (21 MPa, 210 bar)	100 psi (0.7 MPa, 7 bar)
231943	C	Monark®, carbon steel (with 25 ft hose, and gun)	23:1	2300 psi (16 MPa, 160 bar)	100 psi (0.7 MPa, 7 bar)
231944	A	Monark®, carbon steel (without hose and gun)	23:1	2300 psi (16 MPa, 160 bar)	100 psi (0.7 MPa, 7 bar)
231945	C	Monark®, carbon steel (with 50 ft hose, and gun)	23:1	2300 psi (16 MPa, 160 bar)	100 psi (0.7 MPa, 7 bar)
231952	C	Monark®, stainless steel (with 25 ft hose, and gun)	23:1	2300 psi (16 MPa, 160 bar)	100 psi (0.7 MPa, 7 bar)
231958	C	President®, carbon steel (with 25 ft hose, and gun)	15:1	1500 psi (10 MPa, 100 bar)	100 psi (0.7 MPa, 7 bar)
231964	C	Monark®, stainless steel (with fluid regulator, 25 ft hose, and gun)	15:1	1500 psi (10 MPa, 100 bar)	100 psi (0.7 MPa, 7 bar)
232506	C	Monark®, carbon steel (with fluid regulator, 25 ft hose, and gun)	15:1	1500 psi (10 MPa, 100 bar)	100 psi (0.7 MPa, 7 bar)
232507	A	Monark®, carbon steel (with fluid regulator, without hose and gun)	15:1	1500 psi (10 MPa, 100 bar)	100 psi (0.7 MPa, 7 bar)
233078	A	President®, carbon steel (without hose and gun)	30:1	3000 psi (21 MPa, 210 bar)	100 psi (0.7 MPa, 7 bar)

# Symbols

## Warning Symbol



This symbol alerts you to the possibility of serious injury or death if you do not follow the instructions.

## Caution Symbol



This symbol alerts you to the possibility of damage to or destruction of equipment if you do not follow the instructions.

## WARNING



INSTRUCTIONS

### EQUIPMENT MISUSE HAZARD

Equipment misuse can cause the equipment to rupture or malfunction and result in serious injury.

- This equipment is for professional use only.
- Read all instruction manuals, tags, and labels before operating the equipment.
- Use the equipment only for its intended purpose. If you are uncertain about usage, call your Graco distributor.
- Do not alter or modify this equipment. Use only genuine Graco parts and accessories.
- Check equipment daily. Repair or replace worn or damaged parts immediately.
- Do not exceed the maximum working pressure of the lowest rated system component. Refer to the **Technical Data** on page 20 for the maximum working pressure of this equipment.
- Use fluids and solvents which are compatible with the equipment wetted parts. Refer to the **Technical Data** section of all equipment manuals. Read the fluid and solvent manufacturer's warnings.
- Do not use hoses to pull equipment.
- Route hoses away from traffic areas, sharp edges, moving parts, and hot surfaces. Do not expose Graco hoses to temperatures above 180°F (82°C) or below -40°F (-40°C).
- Wear hearing protection when operating this equipment.
- Do not lift pressurized equipment.
- Comply with all applicable local, state, and national fire, electrical, and safety regulations.

# WARNING

## SKIN INJECTION HAZARD



Spray from the gun, hose leaks, or ruptured components can inject fluid into your body and cause extremely serious injury, including the need for amputation. Fluid splashed in the eyes or on the skin can also cause serious injury.



- Fluid injected into the skin might look like just a cut, but it is a serious injury. **Get immediate surgical treatment.**
- Do not point the gun at anyone or at any part of the body.
- Do not put your hand or fingers over the spray tip.
- Do not stop or deflect leaks with your hand, body, glove or rag.
- Do not “blow back” fluid; this is not an air spray system.
- Always have the tip guard and the trigger guard on the gun when spraying.
- Check the gun diffuser operation weekly. Refer to the gun manual.
- Be sure the gun trigger safety operates before spraying.
- Lock the gun trigger safety when you stop spraying.
- Follow the **Pressure Relief Procedure** on page 10 whenever you: are instructed to relieve pressure; stop spraying; clean, check, or service the equipment; and install or clean the spray tip.
- Tighten all fluid connections before operating the equipment.
- Check the hoses, tubes, and couplings daily. Replace worn, damaged, or loose parts immediately. Permanently coupled hoses cannot be repaired; replace the entire hose.
- Use only Graco approved hoses. Do not remove any spring guard that is used to help protect the hose from rupture caused by kinks or bends near the couplings.




## MOVING PARTS HAZARD

Moving parts, such as the air motor piston, can pinch or amputate your fingers.

- Keep clear of all moving parts when starting or operating the pump.
- Before servicing the equipment, follow the **Pressure Relief Procedure** on page 10 to prevent the equipment from starting unexpectedly.

# WARNING



## FIRE AND EXPLOSION HAZARD

Improper grounding, poor ventilation, open flames or sparks can cause a hazardous condition and result in a fire or explosion and serious injury.

- Ground the equipment and the object being sprayed. Refer to **Grounding** on page 7.
- If there is any static sparking or you feel an electric shock while using this equipment, **stop spraying immediately**. Do not use the equipment until you identify and correct the problem.
- Provide fresh air ventilation to avoid the buildup of flammable fumes from solvents or the fluid being sprayed.
- Keep the spray area free of debris, including solvent, rags, and gasoline.
- Electrically disconnect all equipment in the spray area.
- Extinguish all open flames or pilot lights in the spray area.
- Do not smoke in the spray area.
- Do not turn on or off any light switch in the spray area while operating or if fumes are present.
- Do not operate a gasoline engine in the spray area.



## TOXIC FLUID HAZARD

Hazardous fluid or toxic fumes can cause serious injury or death if splashed in the eyes or on the skin, inhaled, or swallowed.

- Know the specific hazards of the fluid you are using.
- Store hazardous fluid in an approved container. Dispose of hazardous fluid according to all local, state, and national guidelines.
- Always wear protective eyewear, gloves, clothing, and respirator as recommended by the fluid and solvent manufacturer.

# Setup

## General Information

**NOTE:** Reference numbers and letters in parentheses in the text refer to the callouts in the figures and the parts drawing.

**NOTE:** Always use Genuine Graco Parts and Accessories, available from your Graco distributor. Refer to Product Data Sheet 305810. If you supply your own accessories, be sure they are adequately sized and pressure-rated for your system.

Fig. 2 is only a guide for selecting and installing system components and accessories. Contact your Graco distributor for assistance in designing a system to suit your particular needs.

## Prepare the Operator

All persons who operate the equipment must be trained in the safe, efficient operation of all system components as well as the proper handling of all fluids. All operators must thoroughly read all instruction manuals, tags, and labels before operating the equipment.

The following manuals are included with this equipment:

- 308690, Cart-Mounted Air-Assisted Packages
- 306981, 30:1 President CST and 15:1 CST Monark Pumps, or
- 308106, 30:1 President SST and 15:1 SST Monark Pumps, or
- 307619, 23:1 CST and SST Monark Pumps, or
- 306936, 15:1 President CST Pump, or
- 306982, President Air Motor
- 307043, Monark Air Motor
- 308686, Air Regulator Kit
- 307273, Fluid Filter
- 307886, Fluid Pressure Regulator (included on 15:1 and 10:1 Monarks only)
- 311001, AA Series Spray Gun (included on all models except 231926, 231935, 231944, and 232507)

## Prepare the Site

**NOTE:** The compressed air supply to the gun must be clean and dry, to prevent damage to the finish. Use a coalescing air filter in the main air supply line.

Ensure that you have an adequate compressed air supply. Refer to the performance charts on page 21 to find the air consumption of your sprayer.

Refer to Fig. 2. Bring a compressed air supply line (A) from the air compressor to the pump location. Be sure all air hoses are properly sized and pressure-rated for your system. Use only electrically conductive hoses. The air hose should have a 3/8 npsm(m) thread.

Install a bleed-type shutoff valve (B) in the air line to isolate the air line components for servicing. Install an air line filter (J) and a moisture trap and drain valve (C) to help remove moisture and contaminants from the compressed air supply.

Keep the site clear of any obstacles or debris that could interfere with the operator's movement.

Have a grounded, metal pail available for use when flushing the system.

# Setup

## Grounding

**⚠ WARNING**

**FIRE AND EXPLOSION HAZARD**  
Before operating the pump, ground the system as explained below. Also read the section **FIRE AND EXPLOSION HAZARD** on page 5.

1. *Pump*: use the ground wire and clamp (supplied). See Fig. 1. Loosen the grounding lug locknut (W) and washer (X). Insert one end of the ground wire (34) into the slot in lug (Z) and tighten the locknut securely. Connect the other end of the wire to a true earth ground.

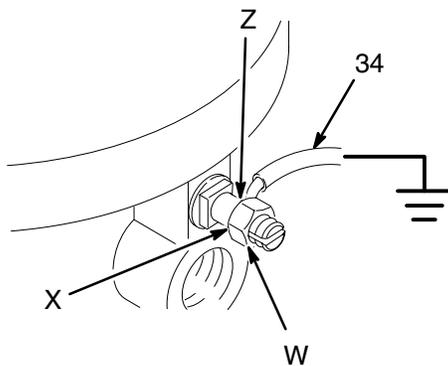


Fig. 1

0720

2. *Air and fluid hoses*: use only electrically conductive hoses.
3. *Air compressor*: follow manufacturer's recommendations.
4. *Spray gun*: ground through connection to a properly grounded fluid hose and pump.
5. *Fluid supply container*: follow your local code.
6. *Object being sprayed*: follow your local code.
7. *Solvent pails used when flushing*: follow your local code. Use only metal pails, which are conductive, placed on a grounded surface. Do not place the pail on a nonconductive surface, such as paper or cardboard, which interrupts the grounding continuity.
8. *To maintain grounding continuity when flushing or relieving pressure*, hold a metal part of the spray gun firmly to the side of a grounded *metal* pail, then trigger the gun.

# Setup

## Supplied Components

Refer to Fig. 2.

### **WARNING**

A red-handled bleed-type master air valve (E) and a fluid drain valve (D) are supplied. These components help reduce the risk of serious injury, including fluid injection and splashing of fluid in the eyes or on the skin, and injury from moving parts if you are adjusting or repairing the pump.

The bleed-type master air valve relieves air trapped between this valve and the pump after the air is shut off. Trapped air can cause the pump to cycle unexpectedly. Locate the valve close to the pump.

The fluid drain valve assists in relieving fluid pressure in the displacement pump, hose, and gun. Triggering the gun to relieve pressure may not be sufficient.

- **The red-handled bleed-type master air valve (E)** is required in your system to relieve air trapped between it and the air motor when the valve is closed (see the **WARNING** above). Be sure the bleed valve is easily accessible from the pump, and is located **downstream** from the pump air regulator (F).
- **The pump air regulator (F)** controls pump speed and outlet pressure by adjusting the air pressure to the pump. Locate close to the pump, but **upstream** from the bleed-type master air valve (E).
- **The air relief valve (41)** opens automatically to prevent overpressurization of the pump.
- **The gun air filter/regulator (G)** adjusts the air pressure to the air-assisted spray gun (106).
- **The air manifold (H)** directs incoming air to the pump and to the gun. It includes an air inlet swivel fitting.
- **The suction hose (25) and tube (26)** allow the pump to draw fluid from a 5 gallon (19 liter) pail (K). The strainer at the end of the suction tube keeps large particles from entering the pump.
- **The fluid filter (16)** includes a 60 mesh (250 micron) stainless steel element to filter particles from the fluid as it leaves the pump. It also includes the **fluid drain valve (D)**, which is required in your system to relieve fluid pressure in the hose and gun (see the **WARNING** at left).
- **The fluid pressure regulator (201)**, included on 15:1 and 10:1 Monarks only, allows more precise adjustment of the fluid pressure at the gun.

**NOTE:** The following components are supplied with complete hose and gun packages only.

- **The air-assisted spray gun (106)** dispenses the fluid. The gun houses the **spray tip (107)**, which is available in a wide range of sizes for different spray patterns and rates of flow.
- The **twin hose (101)** includes a **gun air supply hose (101a)** and a **gun fluid supply hose (101b)**. The **fluid whip hose (103)** allows greater gun maneuverability.
- **The gun filter/swivel (104)** provides a final filtering of fluid before it enters the gun, and allows greater gun maneuverability.

# Setup


## KEY

### SUPPLIED WITH THE SPRAYER

- 1 Cart
- 13 Pump
- 16 Fluid Filter (includes fluid drain valve D)
- 25 Suction Hose
- 26 Suction Tube
- 34 Ground Wire (required; see page 7 for installation instructions)
- 41 Air Relief Valve
- 101 Electrically Conductive Gun Air/Fluid Hose (includes items 101a and 101b)
- 101a Gun Air Supply Hose
- 101b Gun Fluid Supply Hose
- 103 Fluid Whip Hose
- 104 Gun Filter/Swivel
- 106 Air-Assisted Spray Gun
- 201 Fluid Pressure Regulator (15:1 Monarks only) see page 20
- D Fluid Drain Valve
- E\* Red-Handled Bleed-Type Master Air Valve (required, for pump)
- F\* Pump Air Regulator
- G\* Gun Air Filter/Regulator
- H\* Air Manifold
- \* Included in Air Regulation Kit (19).

### COMPONENTS YOU MUST SUPPLY

- A Electrically Conductive Air Supply Hose
- B Bleed-Type Master Air Valve (for accessories)
- C Air Line Moisture Trap and Drain Valve
- J Air Line Filter
- K Grounded 5 Gallon (19 Liter) Pail

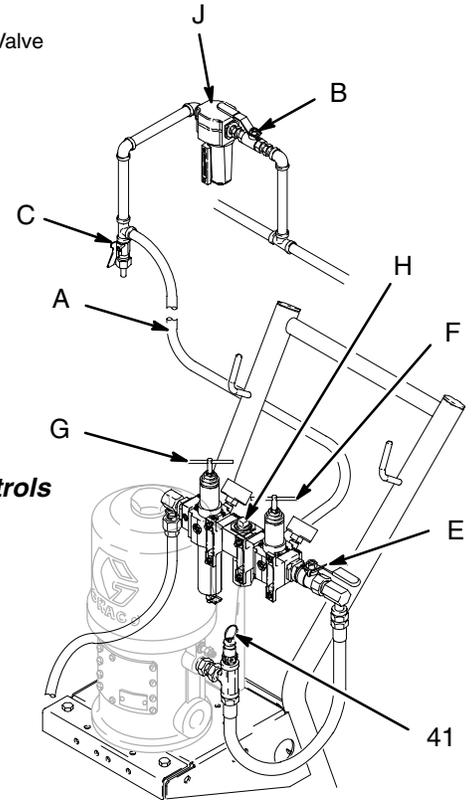

### Model 231925 Shown

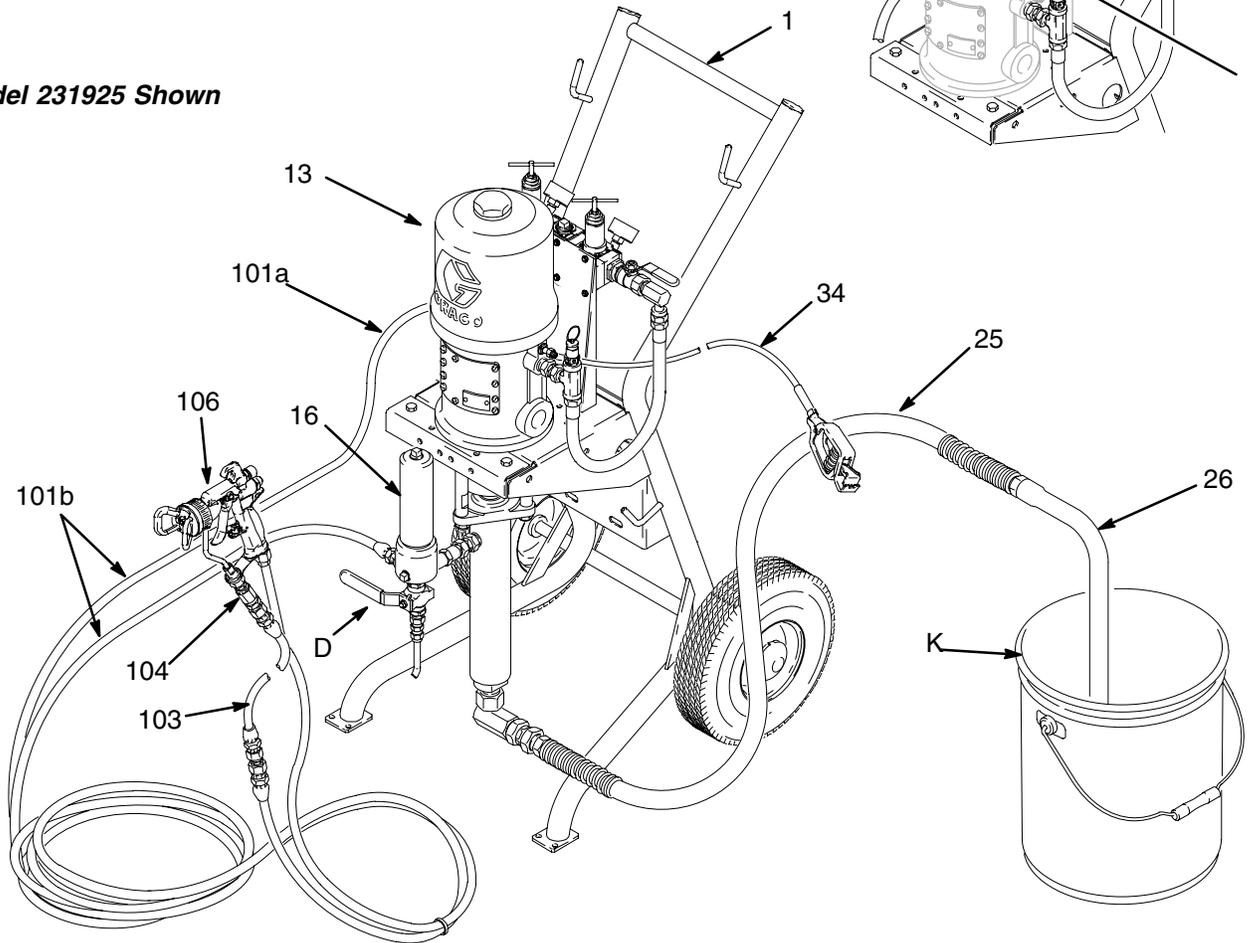



Fig. 2

06720B

# Operation

## Pressure Relief Procedure

### **WARNING**



#### **SKIN INJECTION HAZARD**

The system pressure must be manually relieved to prevent the system from starting or spraying accidentally. Fluid under high pressure can be injected through the skin and cause serious injury. To reduce the risk of an injury from injection, splashing fluid, or moving parts, follow the **Pressure Relief Procedure** whenever you:

- are instructed to relieve the pressure,
- stop spraying,
- check or service any of the system equipment,
- or install or clean the spray tip.

1. Lock the gun trigger safety.
2. Close the red-handled bleed-type master air valve (E, required in your system). See Fig. 3.
3. Unlock the gun trigger safety.
4. Hold a metal part of the gun firmly to the side of a grounded metal pail, and trigger the gun to relieve pressure.
5. Lock the gun trigger safety.
6. Open the drain valve (D, required in your system), having a container ready to catch the drainage.
7. Leave the drain valve open until you are ready to spray again.

*If you suspect that the spray tip or hose is completely clogged, or that pressure has not been fully relieved after following the steps above, **very slowly** loosen the tip guard retaining nut or hose end coupling and relieve pressure gradually, then loosen completely. Now clear the tip or hose.*

## Packing Nut

Before starting, fill the packing nut (L) 1/3 full with Graco Throat Seal Liquid (TSL) or compatible solvent. See Fig. 3.

### **WARNING**

To reduce the risk of serious injury whenever you are instructed to relieve pressure, always follow the **Pressure Relief Procedure** at left.

The packing nut is torqued at the factory and is ready for operation. If it becomes loose and there is leaking from the throat packings, relieve pressure, then torque the nut as specified in your separate pump manual. Do this whenever necessary. Do not overtighten the packing nut.

## Flush the Pump Before First Use

The pump is tested with lightweight oil, which is left in to protect the pump parts. If the fluid you are using may be contaminated by the oil, flush it out with a compatible solvent. See **Flushing** on page 12.

## Prime the Pump

### **CAUTION**

To avoid tip-over, the cart must be on a flat and level surface. Failure to follow this caution could result in injury or equipment damage.

1. See Fig. 3. Remove the tip guard and spray tip from the gun (106). See the gun manual.
2. Close the gun air filter/regulator (G), pump air regulator (F), and bleed-type air valves (B, E).
3. Close the fluid drain valve (D). Open the fluid regulator (201), if present.
4. Connect the air line (A) to the swivel of the air manifold (H).
5. Check that all fittings throughout the system are tightened securely.

*Continued on page 11.*

# Operation

## Prime the Pump (continued)

6. Place the pump suction tube (26) into the fluid supply container.
7. Open the bleed-type air valves (B, E) and the gun air filter/regulator (G).
8. Hold a metal part of the gun (106) firmly to the side of a grounded metal pail and hold the trigger open.
9. Slowly open the pump air regulator (F) until the pump starts.

**NOTE:** To open the air regulator, turn the T-handle in (clockwise). To close the regulator, turn the handle counterclockwise. To lock the regulator setting, tighten the jam nut.

10. Cycle the pump slowly until all air is pushed out and the pump and hoses are fully primed.
11. Release the gun trigger and lock the trigger safety. The pump should stall against pressure.
12. If the pump fails to prime properly, open the drain valve (D). Use the drain valve as a priming valve until the fluid flows from the valve. Close the valve.

**NOTE:** When changing fluid containers with the hose and gun already primed, open the drain valve (D) to help prime the pump and vent air before it enters the hose. Close the drain valve when all air is eliminated.

## Install the Spray Tip

### WARNING

To reduce the risk of serious injury whenever you are instructed to relieve pressure, always follow the **Pressure Relief Procedure** on page 10.

Relieve the pressure. Install the spray tip and tip guard as explained in your separate gun manual, supplied.

The fluid output and pattern width depend on the size of the spray tip, the fluid viscosity, and the fluid pressure. Use the **Spray Tip Selection Chart** in your gun instruction manual as a guide for selecting an appropriate spray tip for your application.

## Adjust the Spray Pattern

1. Start the pump. Use the pump air regulator (F) to adjust the pump speed and fluid pressure until the spray is completely atomized. Use the lowest pressure necessary to get the desired results. Higher pressure may not improve the spray pattern and will cause premature tip and pump wear.

### WARNING

#### COMPONENT RUPTURE HAZARD



To reduce the risk of overpressurizing your package, which could cause component rupture and serious injury, *never exceed 100 psi (0.7 MPa, 7 bar) air input pressure to the package. Never exceed 100 psi (0.7 MPa, 7 bar) air input pressure to the spray gun.* Also refer to the **Technical Data** on page 20 and to your separate component manuals.

2. When applying the fluid, keep the gun a consistent distance, about 8 to 12 inches (200 to 300 mm) from the surface of the object being sprayed. Always hold the gun at a right angle from the surface. Do not make an arc with the gun as it causes an uneven coat of fluid. Use a full-open, full-close triggering action. Practice to find the best length and speed of stroke.
3. To adjust the spray pattern, follow the instructions in your gun manual, supplied.
4. With the pump and lines primed, and with adequate air pressure and volume supplied, the pump will start and stop as you open and close the gun.

### CAUTION

Do not allow the pump to run dry. It will quickly accelerate to a high speed, causing damage. If your pump is running too fast, stop it immediately and check the fluid supply. If the container is empty and air has been pumped into the lines, refill the container and prime the pump and the lines, or flush and leave it filled with a compatible solvent. Eliminate all air from the fluid system.

# Operation

## Shutdown and Care of the Pump

### **WARNING**

To reduce the risk of serious injury whenever you are instructed to relieve pressure, always follow the **Pressure Relief Procedure** on page 10.

For overnight shutdown, stop the pump at the bottom of its stroke to prevent fluid from drying on the exposed displacement rod and damaging the throat packings. Relieve the pressure.

Always flush the pump before the fluid dries on the displacement rod. See **Flushing** below.

## Clean the In-Line Fluid Filter Element

The filter/swivel (104) includes a 100 mesh stainless steel filter element (105). Clean the element periodically with a compatible solvent, as follows.

### **WARNING**

To reduce the risk of serious injury whenever you are instructed to relieve pressure, always follow the **Pressure Relief Procedure** on page 10.

1. Relieve the pressure.
2. Disassemble the filter/swivel (104) and remove the filter element (105).
3. Clean or replace the element, as necessary.
4. Reassemble. Torque the two halves of the filter/swivel to 10–15 ft-lb (14–20 N•m).

## Flushing

### **WARNING**



#### **FIRE AND EXPLOSION HAZARD**

Before flushing, read the section **FIRE AND EXPLOSION HAZARD** on page 5. Be sure the entire system and flushing pails are properly grounded. Refer to **Grounding** on page 7.



Flush the pump:

- Before the first use
- When changing colors or fluids

- Before fluid can dry or settle out in a dormant pump (check the pot life of catalyzed fluids)
- Before storing the pump.

Flush with a fluid that is compatible with the fluid you are pumping and with the wetted parts in your system. Check with your fluid manufacturer or supplier for recommended flushing fluids and flushing frequency.

### **CAUTION**

If you have a carbon steel package, never leave water or water-base fluid in the pump overnight. If you are pumping water-base fluid, flush with water first, then with a rust inhibitor such as mineral spirits. Relieve the pressure, but leave the rust inhibitor in the pump to protect the parts from corrosion.

### **WARNING**

To reduce the risk of serious injury whenever you are instructed to relieve pressure, always follow the **Pressure Relief Procedure** on page 10.

1. Relieve the pressure.
2. Remove the tip guard and spray tip from the gun. See the gun manual.
3. Remove the filter element from the fluid filter (16). Reinstall the filter bowl.
4. Place the suction tube (26) in a container of solvent.
5. Hold a metal part of the gun firmly to the side of a grounded *metal* pail.
6. Start the pump. Always use the lowest possible fluid pressure when flushing.
7. Trigger the gun.
8. Flush the system until clear solvent flows from the gun.
9. Relieve the pressure.
10. Clean the tip guard, spray tip, and fluid filter element separately, then reinstall them.
11. Clean the inside and outside of the suction tube (26).

# Operation


## KEY

- 16 Fluid Filter  
(includes fluid drain valve D)
- 25 Suction Hose
- 26 Suction Tube
- 101 Electrically Conductive  
Air/Fluid Supply Hose
- 103 Fluid Whip Hose
- 104 Gun Filter/Swivel
- 106 Air-Assisted Spray Gun
- A Electrically Conductive  
Air Supply Hose

- B Bleed-Type Master Air Valve  
(for accessories)
- D Fluid Drain Valve
- E Red-Handled Bleed-Type Master  
Air Valve (required, for pump)
- F Pump Air Regulator
- G Gun Air Filter/Regulator
- H Air Manifold
- L Packing Nut/Wet-Cup  
(partially hidden)

 Torque as specified in your separate pump manual.

### Detail of Air Controls

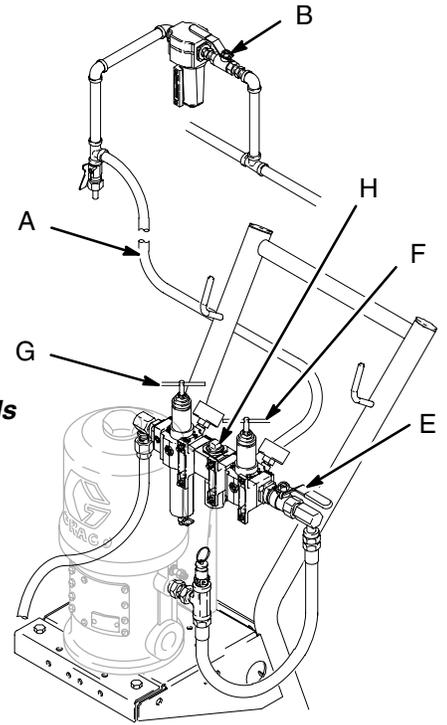

### Model 231925 Shown


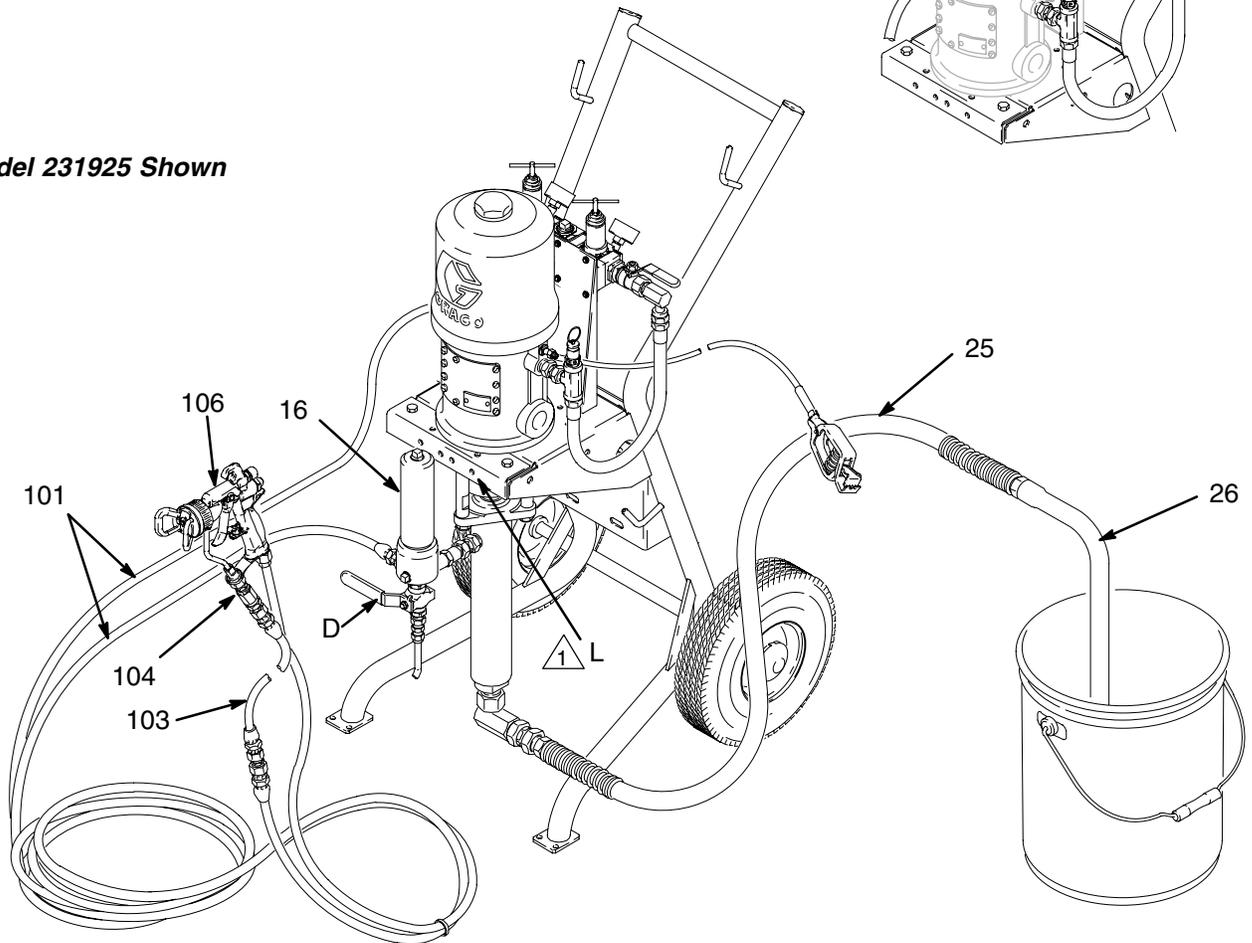


Fig. 3

06720B

# Parts

- Part No. 231925, 231927, 30:1 President, carbon steel (shown)
- Part No. 231926, 233078, 30:1 President, carbon steel (without hose and gun)
- Part No. 231934, 231936, 30:1 President, stainless steel
- Part No. 231945, 30:1 President, stainless steel (without hose and gun)
- Part No. 231958, 15:1 President, carbon steel
- Part No. 231943, 231945, 23:1 Monark, carbon steel
- Part No. 231944, 23:1 Monark, carbon steel (without hose and gun)
- Part No. 231952, 23:1 Monark, stainless steel
- Part No. 231964, 15:1 Monark, stainless steel
- Part No. 232506, 15:1 Monark, carbon steel
- Part No. 232507, 15:1 Monark, carbon steel (without hose and gun)

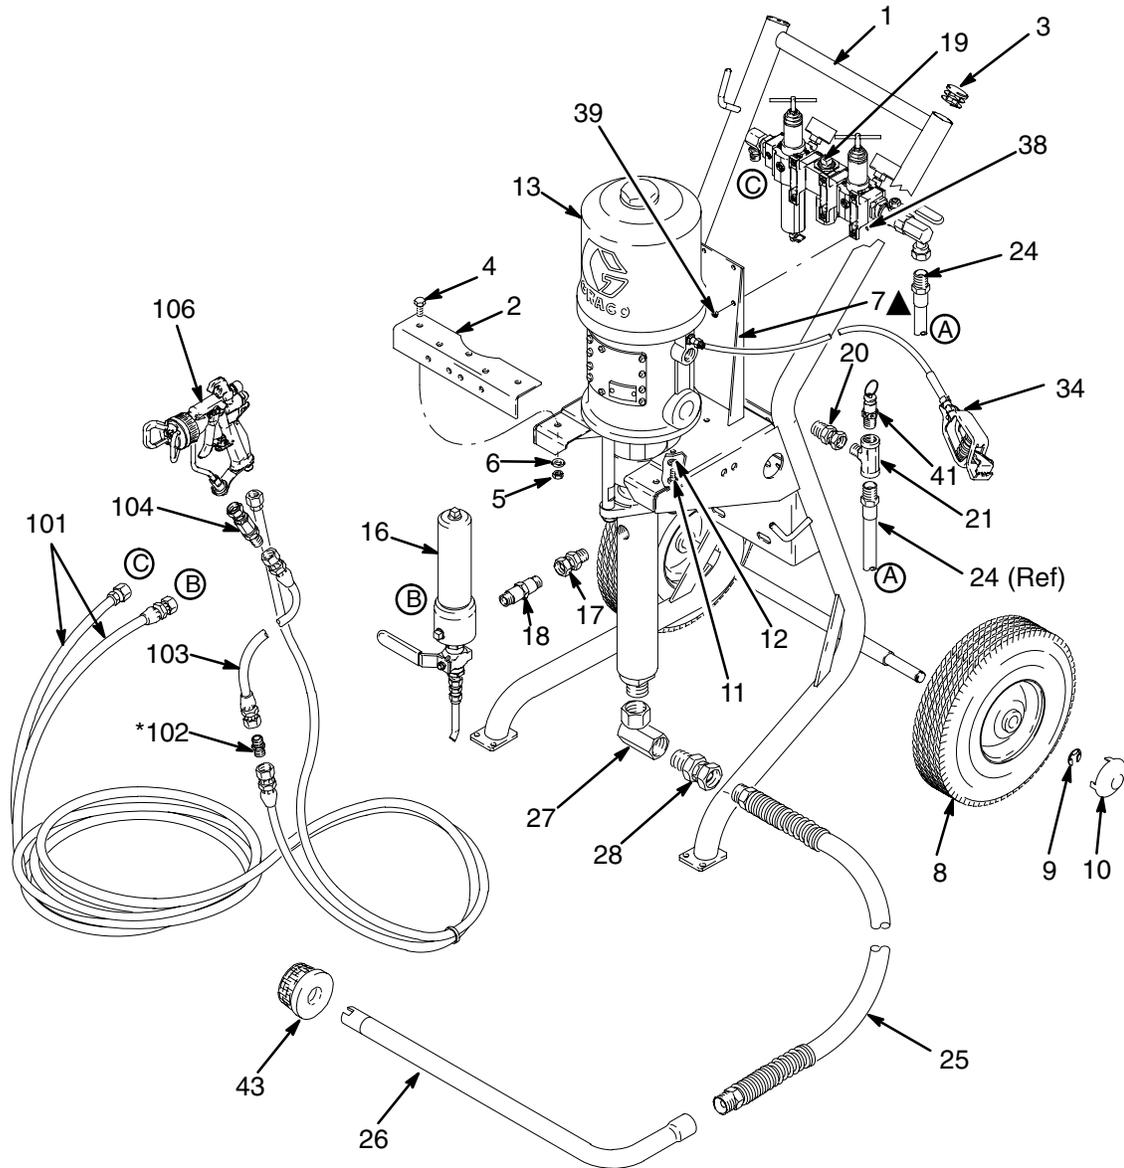

06721B

\*Spare nipple (Ref. 102, cst) is provided with model 233078 for users who want to add a second gun to the outlet filter (Ref. 16).

# Parts

- Part No. 231925, 231927, 30:1 President, carbon steel (shown)  
 Part No. 231926, 233078, 30:1 President, carbon steel (without hose and gun)  
 Part No. 231934, 231936, 30:1 President, stainless steel  
 Part No. 231945, 30:1 President, stainless steel (without hose and gun)  
 Part No. 231958, 15:1 President, carbon steel  
 Part No. 231943, 231945, 23:1 Monark, carbon steel  
 Part No. 231944, 23:1 Monark, carbon steel (without hose and gun)  
 Part No. 231952, 23:1 Monark, stainless steel  
 Part No. 231964, 15:1 Monark, stainless steel  
 Part No. 232506, 15:1 Monark, carbon steel  
 Part No. 232507, 15:1 Monark, carbon steel (without hose and gun)

**NOTE:** Part numbers vary by package. To find the part number used in your package, read down the chart to find the desired ref. no., then read left to right to find the part number for your package.

Ref. No.	Description	Packages							Qty
		CST 231925 231926 231927 233078	SST 231934 231935 231936	CST 231943 231944 231945	SST 231952	CST 231958	SST 231964	CST 232506 232507	
1	CART, portable; includes replaceable items 2–10	238938	238938	238938	238938	238938	238938	238938	1
2	. BRACKET, front	191902	191902	191902	191902	191902	191902	191902	1
3	. CAP	112853	112853	112853	112853	112853	112853	112853	2
4	. CAPSCREW, hex hd; M8 x 1.25; 16 mm (5/8 in.)	108768	108768	108768	108768	108768	108768	108768	2
5	. NUT, keps, hex; M8	113761	113761	113761	113761	113761	113761	113761	2
6	. WASHER, flat; 8 mm	108788	108788	108788	108788	108788	108788	108788	2
7▲	. LABEL, warning	290331	290331	290331	290331	290331	290331	290331	1
8	. WHEEL	106062	106062	106062	106062	106062	106062	106062	2
9	. RING, retaining	101242	101242	101242	101242	101242	101242	101242	2
10	. HUBCAP	104811	104811	104811	104811	104811	104811	104811	2
11	CAPSCREW, hex hd; 1/4–20 x 5/8 in. (16 mm)	100270	100270			100270		100270	2
	CAPSCREW, hex hd; 1/4–20 x 3/4 in. (19 mm)			100022	100022		100022		2
12	LOCKWASHER, spring; 1/4 in.	100016	100016	100016	100016	100016	100016	100016	2
13	PUMP, 30:1 President; cst; <i>see manual 306981 models 231925 and 231926</i>	223586							1
	PUMP, 30:1 President; cst; without hose and gun; model 233078	243664							
	PUMP, 30:1 President; sst; <i>see manual 308106</i>		223843						1
	PUMP, 23:1 Monark; cst; <i>see manual 307619</i>			223596					1
	PUMP, 23:1 Monark; sst; <i>see manual 307619</i>				237958				1
	PUMP, 15:1 President; cst; <i>see manual 306936</i>					217580			1
	PUMP, 15:1 Monark; sst; <i>see manual 306936</i>						223844		1
PUMP, 15:1 Monark; cst; <i>see manual 306981</i>							239327	1	

▲ Replacement Danger and Warning labels, tags and cards are available at no cost. This label is also available in the following languages: German (Part No. 290396), French (Part No. 290397), and Spanish (Part No. 290398).

# Parts

**Part No. 231925, 231927, 30:1 President, carbon steel (shown)**

**Part No. 231926, 233078, 30:1 President, carbon steel (without hose and gun)**

**Part No. 231934, 231936, 30:1 President, stainless steel**

**Part No. 231945, 30:1 President, stainless steel (without hose and gun)**

**Part No. 231958, 15:1 President, carbon steel**

**Part No. 231943, 231945, 23:1 Monark, carbon steel**

**Part No. 231944, 23:1 Monark, carbon steel (without hose and gun)**

**Part No. 231952, 23:1 Monark, stainless steel**

**Part No. 231964, 15:1 Monark, stainless steel**

**Part No. 232506, 15:1 Monark, carbon steel**

**Part No. 232507, 15:1 Monark, carbon steel (without hose and gun)**

**NOTE:** Part numbers vary by package. To find the part number used in your package, read down the chart to find the desired ref. no., then read left to right to find the part number for your package.

Ref. No.	Description	Packages							Qty
		CST 231925 231926 231927 233078	SST 231934 231935 231936	CST 231943 231944 231945	SST 231952	CST 231958	SST 231964	CST 232506 232507	
16	FLUID FILTER; cst; <i>see manual 307273</i>	239060		239060		239060		239060	1
	FLUID FILTER; sst; <i>see manual 307273</i>		239063		239063		239063		1
17	UNION, swivel, straight; cst; 3/8 npt(m) x 3/8 npsm(f)	155665		155665				155665	1
	UNION, swivel, 45°; sst; 3/8 npt(m) x 3/8 npsm(f)		209029		209029		209029		1
	UNION, swivel; cst; 1/2 npt(m) x 3/8 npsm(f)					158256			1
18	NIPPLE; cst; 3/8 npt	156850		156850		156850		156850	1
	NIPPLE; sst; 3/8 npt		191931		191931		191931		1
19	AIR REGULATOR KIT; <i>see manual 308686</i>	238939	238939	238939	238939	238939	238939	238939	1
20	UNION, swivel; cst; 1/2 npt(m) x 3/8 npsm(f)	158256	158256			158256			1
	UNION, swivel; cst; 3/8 npt(m) x 3/8 npsm(f)			155665	155665		155665	155665	1
21	TEE; 3/8 npt(f) run x 3/8 npt(m) branch	113777	113777	113777	113777	113777	113777	113777	1
24	HOSE, air; 3/8 in. (10 mm) ID; 3/8 npt(mbe); 22 in. (559 mm) long	239061	239061	239061	239061	239061	239061	239061	1
25	HOSE, suction; 3/4 npt (mbe) cst fittings; 3.5 ft (1 m) long	214960		214960		214960		214960	1
	HOSE, suction; 3/4 npt (mbe) sst fittings; 3.5 ft (1 m) long		236075		236075		236075		1
26	TUBE, suction; aluminum	192121		192121		192121		192121	1
	TUBE, suction; sst		112191		112191		112191		1
27	UNION, swivel, 90°; cst; 3/4 npt(f) x 3/4 npsm(f)	156589		156589		156589		156589	1
	UNION, swivel, 90°; sst; 3/4 npt (fbe)		112572		112572		112572		1

# Parts

**Part No. 231925, 231927, 30:1 President, carbon steel (shown)**

**Part No. 231926, 233078, 30:1 President, carbon steel (without hose and gun)**

**Part No. 231934, 231936, 30:1 President, stainless steel**

**Part No. 231945, 30:1 President, stainless steel (without hose and gun)**

**Part No. 231958, 15:1 President, carbon steel**

**Part No. 231943, 231945, 23:1 Monark, carbon steel**

**Part No. 231944, 23:1 Monark, carbon steel (without hose and gun)**

**Part No. 231952, 23:1 Monark, stainless steel**

**Part No. 231964, 15:1 Monark, stainless steel**

**Part No. 232506, 15:1 Monark, carbon steel**

**Part No. 232507, 15:1 Monark, carbon steel (without hose and gun)**

**NOTE:** Part numbers vary by package. To find the part number used in your package, read down the chart to find the desired ref. no., then read left to right to find the part number for your package.

Ref. No.	Description	Packages							Qty
		CST 231925 231926 231927 233078	SST 231934 231935 231936	CST 231943 231944 231945	SST 231952	CST 231958	SST 231964	CST 232506 232507	
28	UNION, swivel; cst; 3/4 npt(m) x 3/4 npsm(f)	157785		157785		157785		157785	1
	UNION, swivel; sst; 3/4 npt(m) x 3/4 npsm(f)		112268		112268		112268		1
33	THROAT SEAL LIQUID; 1 pint (0.5 liter); not shown	206994	206994	206994	206994	206994	206994	206994	1
34	GROUND WIRE AND CLAMP	238909	238909	238909	238909	238909	238909	238909	1
38	SCREW, socket; M5 x 0.8; 16 mm (5/8 in.)	113768	113768	113768	113768	113768	113768	113768	6
39	NUT, hex, self-locking; M5 x 0.8	105332	105332	105332	105332	105332	105332	105332	6
41	VALVE, relief; 125 psi (0.86 MPa, 8.6 bar)	113769	113769	113769	113769	113769	113769	113769	1
43	STRAINER, suction tube; 1/2 npt(f); sst	181073		181073		181073		181073	1
	STRAINER, suction tube; 3/4 npt(f); sst		183770		183770		183770		1
44	NUT, hex; 1/4–20; not shown			100015	100015		100015	100015	2
45	NIPPLE, cst; 1/4 npt x 1/4 npsm; not shown	162453*							1

\*\* Supplied on Model 233078 only, to connect a second hose and gun to the fluid outlet filter (16).

# Hose and Gun Parts

**Part No. 231925, 231927, 30:1 President, carbon steel (shown)**

**Part No. 231934, 231936, 30:1 President, stainless steel**

**Part No. 231958, 15:1 President, carbon steel**

**Part No. 231943, 231945, 23:1 Monark, carbon steel**

**Part No. 231952, 23:1 Monark, stainless steel**

**Part No. 231964, 15:1 Monark, stainless steel**

**Part No. 232506, 15:1 Monark, carbon steel**

**NOTE:** The following part numbers apply only to packages supplied with a hose and gun. Part numbers vary by package. To find the part number used in your package, read down the chart to find the desired ref. no., then read left to right to find the part number for your package.

Ref. No.	Description	Packages										Qty.
		CST 231925	CST 231927	SST 231934	SST 231936	CST 231943	CST 231945	SST 231952	CST 231958	SST 231964	CST 232506	
101	HOSE, twin, air/fluid; nylon; 1/4 in. (6 mm) ID; 1/4 npsm (fbe); cst fluid fittings; 24.6 ft (7.5 m) long	239102				239102			239102		239102	1
	HOSE, twin, air/fluid; nylon; 1/4 in. (6 mm) ID; 1/4 npsm (fbe); sst fluid fittings; 24.6 ft (7.5 m) long			239074				239074		239074		1
	HOSE, twin, air/fluid; nylon; 1/4 in. (6 mm) ID; 1/4 npsm (fbe); cst fluid fittings; 49.2 ft. (15 m) long		239104				239104					1
	HOSE, twin, air/fluid; nylon; 1/4 in. (6 mm) ID; 1/4 npsm (fbe); sst fluid fittings; 49.2 ft. (15 m) long				239076							1
102	NIPPLE; cst; 1/4 npt x 1/4 npsm	162453	162453			162453			162453			1
	NIPPLE; sst; 1/4 npt x 1/4 npsm			166846	166846			166846		166846		1
103	HOSE, whip, fluid; nylon; 3/16 in. (5 mm) ID; 1/4 npsm (fbe); cst fittings; 23.6 in. (0.6 m) long	238708	238708			238708			238708			1
	HOSE, whip, fluid; nylon; 3/16 in. (5 mm) ID; 1/4 npsm (fbe); sst fittings; 23.6 in. (0.6 m) long			239069	239069			239069		239069		1
104	FILTER/SWIVEL, gun; includes replaceable item 105	239394	239394	239394	239394	239394	239394	239394	239394	239394	239394	1
105	ELEMENT, filter; 100 mesh sst; not shown	205264	205264	205264	205264	205264	205264	205264	205264	205264	205264	1
106	AA SERIES SPRAY GUN; with AAM413 tip; see manual 311001	249242	249242	249242	249242	249242	249242	249242	249242	249242	249242	1
107	SPRAY TIP; customer's choice; not shown	AAMxxx	1									

# Fluid Pressure Regulator Parts


**Part No. 232506, 15:1 Monark, carbon steel**

**Part No. 232507, 15:1 Monark, carbon steel (without hose and gun)**

**Part No. 231964, 15:1 Monark, stainless steel**

**NOTE:** The following part numbers apply only to packages supplied with a fluid regulator. Part numbers vary by package. To find the part number used in your package, read down the chart to find the desired ref. no., then read left to right to find the part number for your package.

Ref. No.	Description	Packages		Qty
		CST 232506 232507	SST 231964	
201	FLUID PRESSURE REGULATOR; sst; <i>see manual 307886</i>	222121	222121	1
202	HOSE; nylon; 1/4 in. (6 mm) ID; 1/4 npsm (fbe) cst fittings; 3 ft (0.9 m) long	H42503		1
	HOSE; nylon; 1/4 in. (6 mm) ID; 1/4 npsm (fbe) sst fittings; 14 in. (356 mm) long		239109	1
203	ELBOW, street, 90°; 1/4 npt (m x f); cst	100840		1
	ELBOW, street, 90°; 1/4 npt (m x f); sst		166866	1
204	NIPPLE; cst; 1/4 npt x 1/4 npsm	162453		1
	NIPPLE; sst; 1/4 npt x 1/4 npsm		166846	1
205	CROSS; 1/4 npt(m) x 1/4 npsm(m) x two 1/4 npt(f); sst	112168	112168	1
206	GAUGE, pressure, fluid; cst	802072		1
	GAUGE, pressure, fluid; sst		112564	1
208	BRACKET, regulator	185251	185251	1
209	CAPSCREW, hex hd; 3/8-16 x 3/4 in. (19 mm)	100469	100469	1
210	LOCKWASHER; 3/8 in.	100322	100322	2
211	NUT, hex; 3/8-16	100307	100307	1
212	LOCKWASHER; 1/4 in.	100016	100016	2
213	CAPSCREW, hex hd; 1/4-20 x 5/8 in. (16 mm)	100270	100270	2
215	PLUG; 1/4 npt; cst	100721		1
	PLUG; 1/4 npt; sst		111697	1

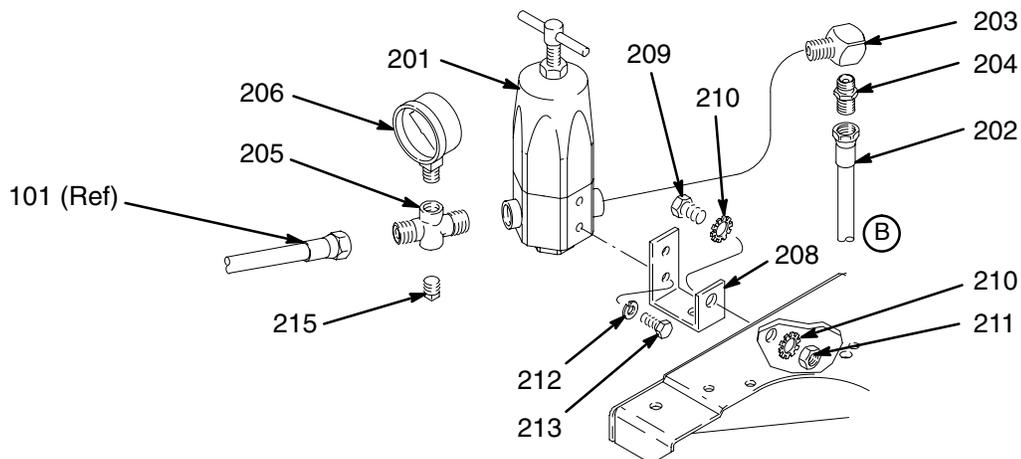

# Technical Data

Category	Data
Maximum fluid working pressure	<i>Part Nos. 231925, 231926, 231934, 231927, 231935, 231936, 233078:</i> 3000 psi (21 MPa, 210 bar) <i>Part Nos. 231943, 231944, 231952, 231945:</i> 2300 psi (16 MPa, 160 bar) <i>Part No. 231958, 231964, 232506, 232507:</i> 1500 psi (10 MPa, 100 bar)
Maximum air input pressure	<i>All Part Nos.:</i> 100 psi (0.7 MPa, 7 bar)
Maximum gun air input pressure	100 psi (0.7 MPa, 7 bar)
Ratio	<i>Part Nos. 231925, 231926, 231934, 233078, 231927, 231935, 231936:</i> 30:1 <i>Part Nos. 231943, 231944, 231952, 231945:</i> 23:1 <i>Part No. 231958, 231964, 232506, 232507:</i> 15:1
Maximum operating temperature	120°F (50°C)
Wetted parts	<i>Pump:</i> See applicable pump manual <i>Spray Gun:</i> See gun manual 311001 <i>Fluid Filter:</i> See filter manual 307273 <i>Fluid Hoses:</i> Nylon

## Sound Pressure Levels (dBa) (measured at 1 meter from unit)

Air Motor	Input Air Pressures at 15 cycles per minute		
	40 psi (0.28 MPa, 2.8 bar)	70 psi (0.48 MPa, 4.8 bar)	100 psi (0.7 MPa, 7 bar)
President	73.6 dB(A)	78.34 dB(A)	80.85 dB(A)
Monark	73.25 dB(A)	75.85 dB(A)	77.65 dB(A)

## Sound Power Levels (dBa) (tested in accordance with ISO 9614–2)

Air Motor	Input Air Pressures at 15 cycles per minute		
	40 psi (0.28 MPa, 2.8 bar)	70 psi (0.48 MPa, 4.8 bar)	100 psi (0.7 MPa, 7 bar)
President	87.4 dB(A)	92.09 dB(A)	94.62 dB(A)
Monark	87.0 dB(A)	89.65 dB(A)	91.43 dB(A)

# Technical Data

## Performance Charts

**To find Fluid Outlet Pressure** (psi/MPa/bar) at a specific fluid flow (lpm/gpm) and operating air pressure (psi/MPa/bar):





1. Locate desired flow along bottom of chart.
2. Follow vertical line up to intersection with selected fluid outlet pressure curve (black). Follow left to scale to read fluid outlet pressure.

**KEY:** Fluid Outlet Pressure – Black Curves  
Air Consumption – Gray Curves

**To find Pump Air Consumption** (m<sup>3</sup>/min. or scfm) at a specific fluid flow (lpm/gpm) and air pressure (psi/MPa/bar):

1. Locate desired flow along bottom of chart.
2. Read vertical line up to intersection with selected air consumption curve (gray). Follow right to scale to read air consumption.


**A** 100 psi (0.7 MPa, 7 bar) air pressure  
**B** 70 psi (0.49 MPa, 4.9 bar) air pressure  
**C** 40 psi (0.28 MPa, 2.8 bar) air pressure

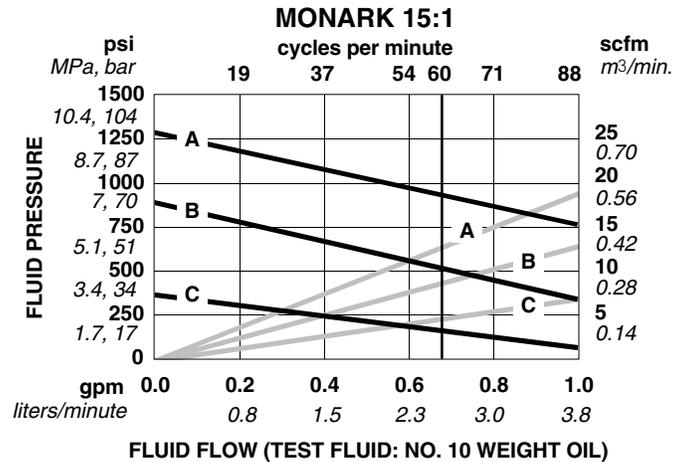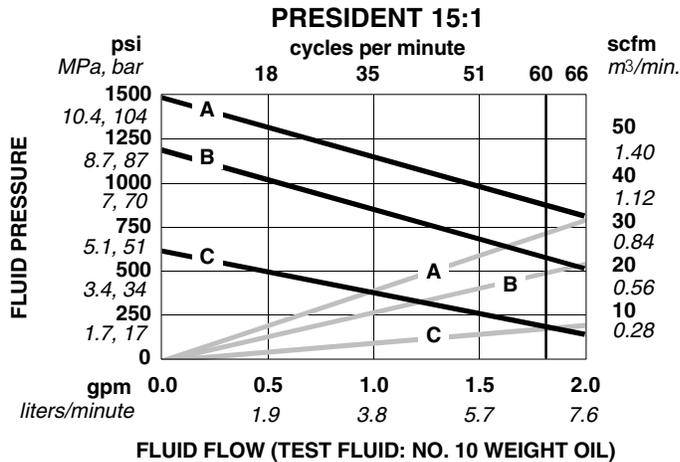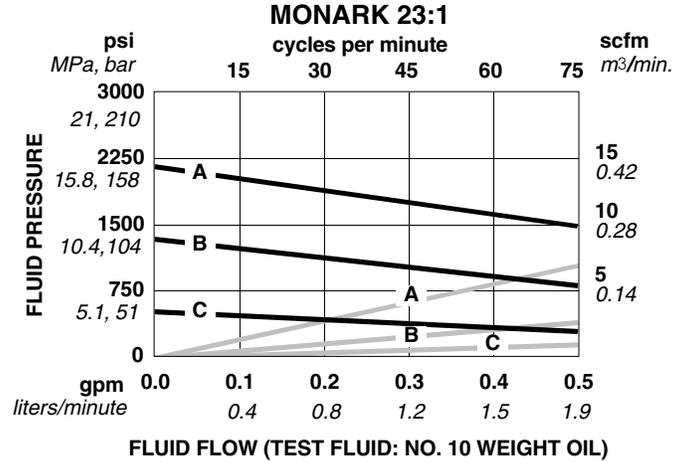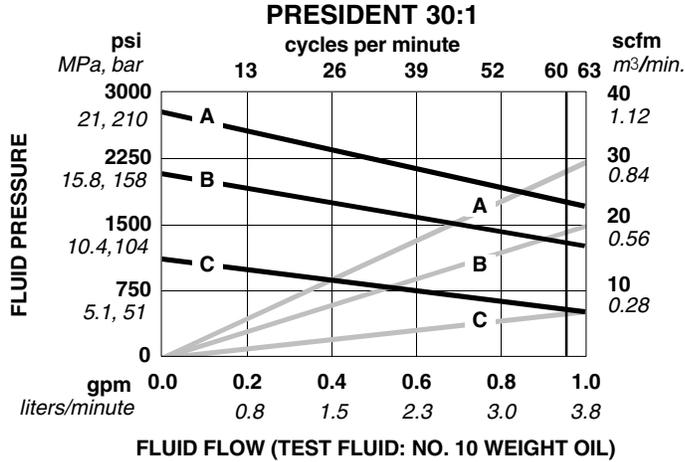



# Dimensions

Model 231926 Shown

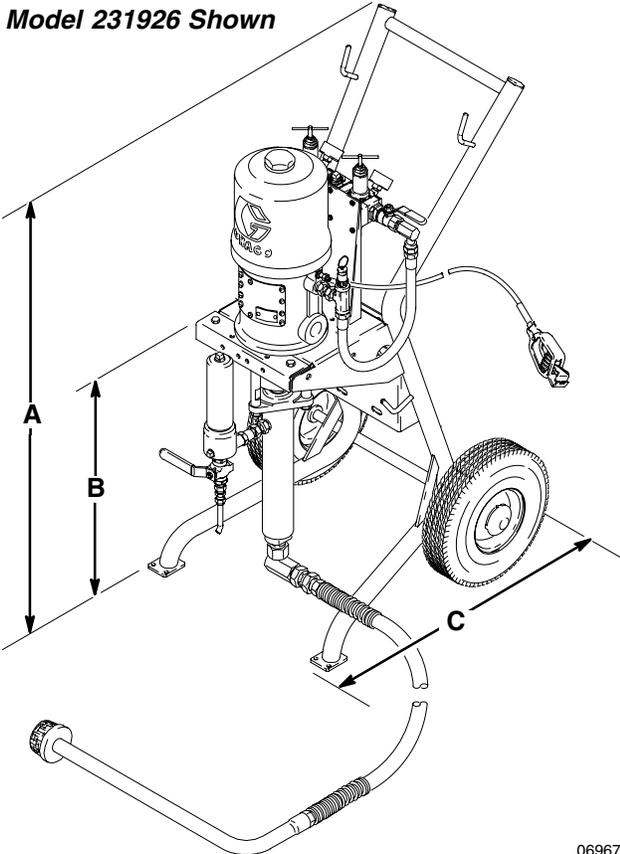

06967

## All Packages

A	B	C	Width Across Wheels	Weight
38.5 in. (978 mm)	22.5 in. (572 mm)	21 in. (534 mm)	20 in. (508 mm)	85 lb (39 kg)

# Graco Standard Warranty

Graco warrants all equipment referenced in this document which is manufactured by Graco and bearing its name to be free from defects in material and workmanship on the date of sale to the original purchaser for use. With the exception of any special, extended, or limited warranty published by Graco, Graco will, for a period of twelve months from the date of sale, repair or replace any part of the equipment determined by Graco to be defective. This warranty applies only when the equipment is installed, operated and maintained in accordance with Graco's written recommendations.

This warranty does not cover, and Graco shall not be liable for general wear and tear, or any malfunction, damage or wear caused by faulty installation, misapplication, abrasion, corrosion, inadequate or improper maintenance, negligence, accident, tampering, or substitution of non-Graco component parts. Nor shall Graco be liable for malfunction, damage or wear caused by the incompatibility of Graco equipment with structures, accessories, equipment or materials not supplied by Graco, or the improper design, manufacture, installation, operation or maintenance of structures, accessories, equipment or materials not supplied by Graco.

This warranty is conditioned upon the prepaid return of the equipment claimed to be defective to an authorized Graco distributor for verification of the claimed defect. If the claimed defect is verified, Graco will repair or replace free of charge any defective parts. The equipment will be returned to the original purchaser transportation prepaid. If inspection of the equipment does not disclose any defect in material or workmanship, repairs will be made at a reasonable charge, which charges may include the costs of parts, labor, and transportation.

**THIS WARRANTY IS EXCLUSIVE, AND IS IN LIEU OF ANY OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO WARRANTY OF MERCHANTABILITY OR WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE.**

Graco's sole obligation and buyer's sole remedy for any breach of warranty shall be as set forth above. The buyer agrees that no other remedy (including, but not limited to, incidental or consequential damages for lost profits, lost sales, injury to person or property, or any other incidental or consequential loss) shall be available. Any action for breach of warranty must be brought within two (2) years of the date of sale.

**GRACO MAKES NO WARRANTY, AND DISCLAIMS ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, IN CONNECTION WITH ACCESSORIES, EQUIPMENT, MATERIALS OR COMPONENTS SOLD BUT NOT MANUFACTURED BY GRACO.** These items sold, but not manufactured by Graco (such as electric motors, switches, hose, etc.), are subject to the warranty, if any, of their manufacturer. Graco will provide purchaser with reasonable assistance in making any claim for breach of these warranties.

In no event will Graco be liable for indirect, incidental, special or consequential damages resulting from Graco supplying equipment hereunder, or the furnishing, performance, or use of any products or other goods sold hereto, whether due to a breach of contract, breach of warranty, the negligence of Graco, or otherwise.

## **FOR GRACO CANADA CUSTOMERS**

The parties acknowledge that they have required that the present document, as well as all documents, notices and legal proceedings entered into, given or instituted pursuant hereto or relating directly or indirectly hereto, be drawn up in English. Les parties reconnaissent avoir convenu que la rédaction du présente document sera en Anglais, ainsi que tous documents, avis et procédures judiciaires exécutés, donnés ou intentés à la suite de ou en rapport, directement ou indirectement, avec les procédures concernées.

## Graco Information

**TO PLACE AN ORDER**, contact your Graco distributor, or call one of the following numbers to identify the distributor closest to you:

**1-800-328-0211 Toll Free**  
**612-623-6921**  
**612-378-3505 Fax**

*All written and visual data contained in this document reflects the latest product information available at the time of publication.  
Graco reserves the right to make changes at any time without notice.*

MM 308690

**Graco Headquarters:** Minneapolis  
**International Offices:** Belgium, China, Japan, Korea

**GRACO INC. P.O. BOX 1441 MINNEAPOLIS, MN 55440-1441**

PRINTED IN U.S.A. 308690 01/1997, Revised 03/2006